

All-spherical telescope with extremely wide field of view

V. Yu. Terebizh^{1,2*}

¹Crimean Astrophysical Observatory, Nauchny, Crimea 298409

²Institute of Astronomy RAN, Moscow 119017, Russian Federation

July 25, 2015

Abstract

An all-spherical catadioptric system made of glass of one type is proposed for the monitoring of large sky areas. We provide an example of such a system with the aperture of diameter 400 mm and the curved field of 30° in diameter.

There are two main tasks in carrying out surveys of large areas of the sky: 1) we need to cover *sequentially* the area in the shortest time; 2) the sky area we are interested in should be under *continuous* observation, as is the case when looking for the transient objects. To some extent, problems of the first kind can be solved with the help of wide-field telescopes with a flat field of view, which size is now reaching 10° . It is easily seen that problems of the second kind require too many flat-field telescopes, so it seems that the best way in this case is the creation of a single telescope with an extremely wide angular field, even at a spherical focal surface. Just this way was chosen in the second half of the last century, when the Baker-Nunn and Maksutov-Sosnina cameras were put into operation. Their angular field attained tens of degrees, while shielding of light and curvature of focal surface were overcome by application of narrow emulsion tape. The main disadvantages of these cameras were the following: 1) the lens surfaces were substantially aspheric; 2) the demanding sorts of glass were used in correctors; 3) nevertheless, the

*E-mail: valery@terebizh.ru

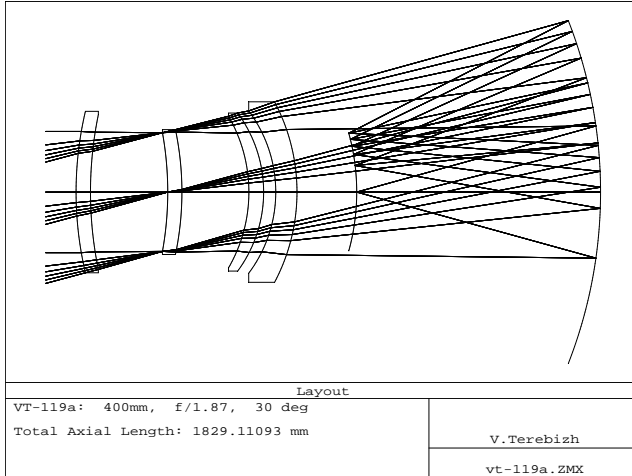


Figure 1: Optical layout of design VT-119a with entrance pupil diameter of 400 mm and a field of 30°.

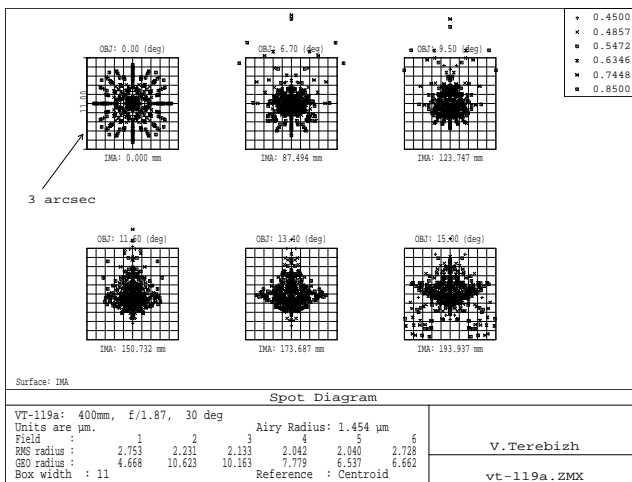


Figure 2: Spot diagram of VT-119a in the polychromatic waveband 0.45 – 0.85 μm . The field angles are 0°, 6.7°, 9.5°, 11.6°, 13.4° and 15.0° (equal areas). Airy disc diameter is 2.9 μm , box width is 11 $\mu\text{m} \simeq 3''$.

image quality was inadequate. For example, four surfaces of the Baker-Nunn camera were aspheres of 4th and 8th orders, the Schott KzFS2 and SK14 glasses were applied, but the calculated image of a point-like source of light had nearly $100\ \mu\text{m}$ ($40''$) diameter.

It is quite surprising that an *all-spherical* system made of simplest types of glass yet provides image quality close to the diffraction-limited one in a wide integral waveband. An example shown in Fig. 1 has been designed for the aperture 400 mm, effective focal length 750 mm ($f/1.9$), waveband $0.45 - 0.85\ \mu\text{m}$ and the field of view diameter 30° . All lenses can be made of the same material; we prefer to use the fused silica because of its stability and excellent optical properties (in particular, high UV-transparency). Fig. 2 shows that the image quality is nearly the same across the field. The diameter D_{80} of a star image varies from $5.6\ \mu\text{m}$ ($1.5''$) at the optical axis to $7.6\ \mu\text{m}$ ($2.1''$) at the field edge. The complete description of the system is given in Table 1.

The system described above proceeds from two generic versions of the Schmidt camera, which then developed by D.D. Maksutov, D.G. Hawkins, E.H.Linfoot, C.G. Wynne and J.G. Baker (see Terebizh 2011 for discussion and references). Our goal was the complete elimination of the aspherical surfaces by entering a double Wynne [1947] meniscus – the first and forth lenses; the two inner lenses were inserted to minimize the chromatic aberration. (However, a system with three lenses provides only slightly inferior images.) A similar double-meniscus corrector was applied by Baker in his Super-Schmidt design, but he placed inside a highly aspheric correction plate such as that introduced by Schmidt.

The method of working with the spherical focal surface applicable currently is to use small flat detectors each of which equipped with a flattening lens. This way has been implemented, e.g., in the *Kepler* space telescope. In our example, the radius of curvature of the focal surface is 733 mm, so for a small flat detector of size, say, 25 mm the edge images are blurred up to 30 microns. Our preliminary consideration shows that image quality can be improved considerably even by a single lenslet made of fused silica, and is fully recovered using the doublet of the same material. Of course, large curved light detectors, the production of which has just begun, will be used in future.

As regards losses of light, a detector in the form of a band of size $30^\circ \times 5^\circ$ ($39\ \text{cm} \times 6.5\ \text{cm}$) shields less than 7% of flux. Evidently, the light detectors can be placed on the field freely, i.e., respectively the studied area of the sky.

Table 1: VT-119a design with an aperture of 400 mm and 30° field of view. R_0 – paraxial curvature radius, T – distance to the next surface, D – light diameter, FS – fused silica. All surfaces are spheres.

Surf. No.	Comments	R_0 (mm)	T (mm)	Glass	D (mm)
1	Lens 1	1166.622	47.500	FS	532.3
2		1267.954	254.723	–	510.4
3	Lens 2 Stop	–1103.18	46.700	FS	391.3
4		–1002.28	220.793	–	411.7
5	Lens 3	–498.974	48.600	FS	500.0
6		–439.472	39.973	–	521.1
7	Lens 4	–446.110	70.000	FS	535.2
8		–635.820	1000.82	–	595.1
9	Primary	–1555.69	–803.901	Mirror	1130.4
10	Image	–733.005	–	–	388.0

It may be expected that the instruments of this type will compete with large conventional telescopes both in sequential and in continuous sky surveys.

I thank M. Boer (Recherche CNRS ARTEMIS, France) for stimulating discussions.

References

- [1] Terebizh V.Yu., 2011, *Astron. Nachr. / AN*, 332, 714.
- [2] Wynne C.G., 1947. *Monthly Notices of RAS*, 107, 356.